


# Solenoid controlled 6/2 directional control valve R3/8", M18x1.5

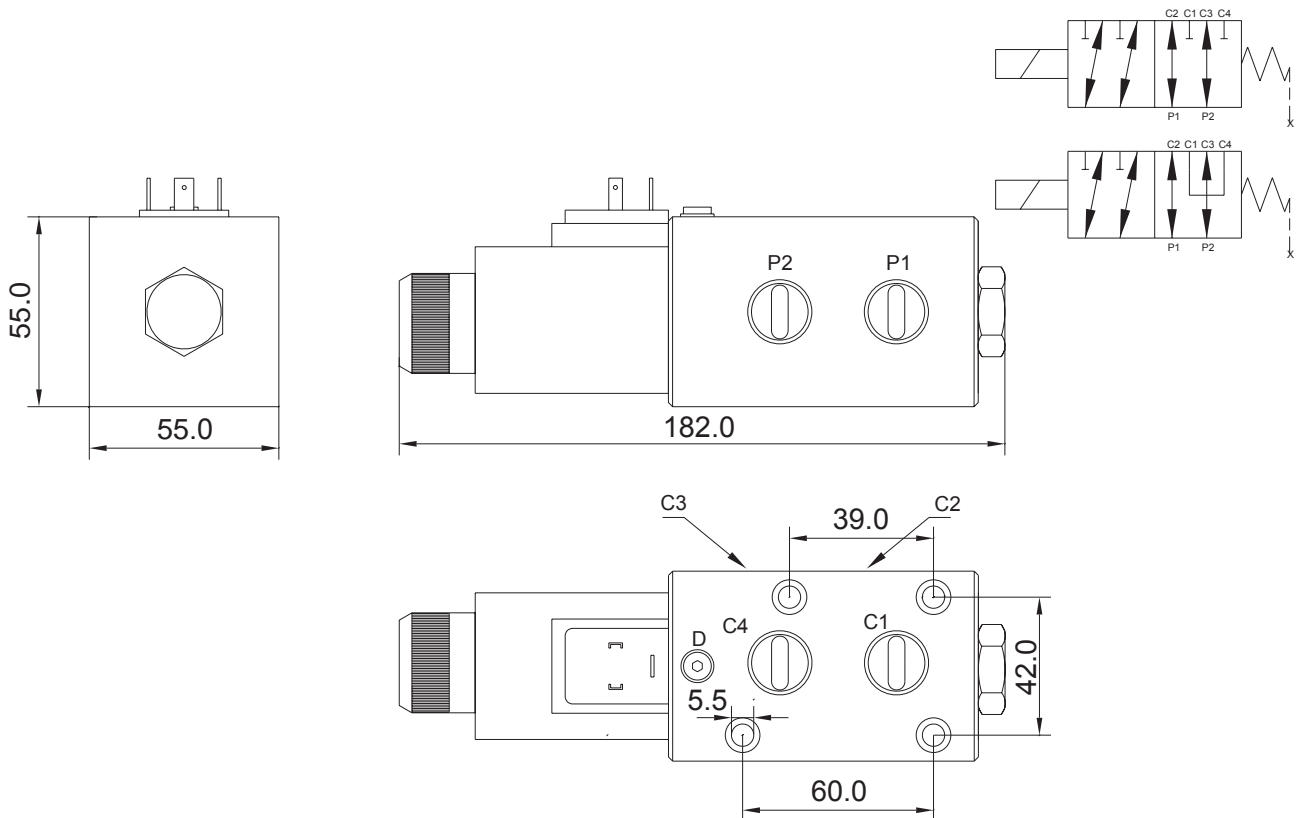

VOLTAGE
12 VDC
24 VDC

Model	Threaded coupling	Flow l/min	Max. pres. bar.
E6238	R 3/8"	50	210
E62M18	M18x1.5	50	210