


Solenoid controlled 6/2 directional control valve R1/2", R3/4", M22x1.5, M27x2.0

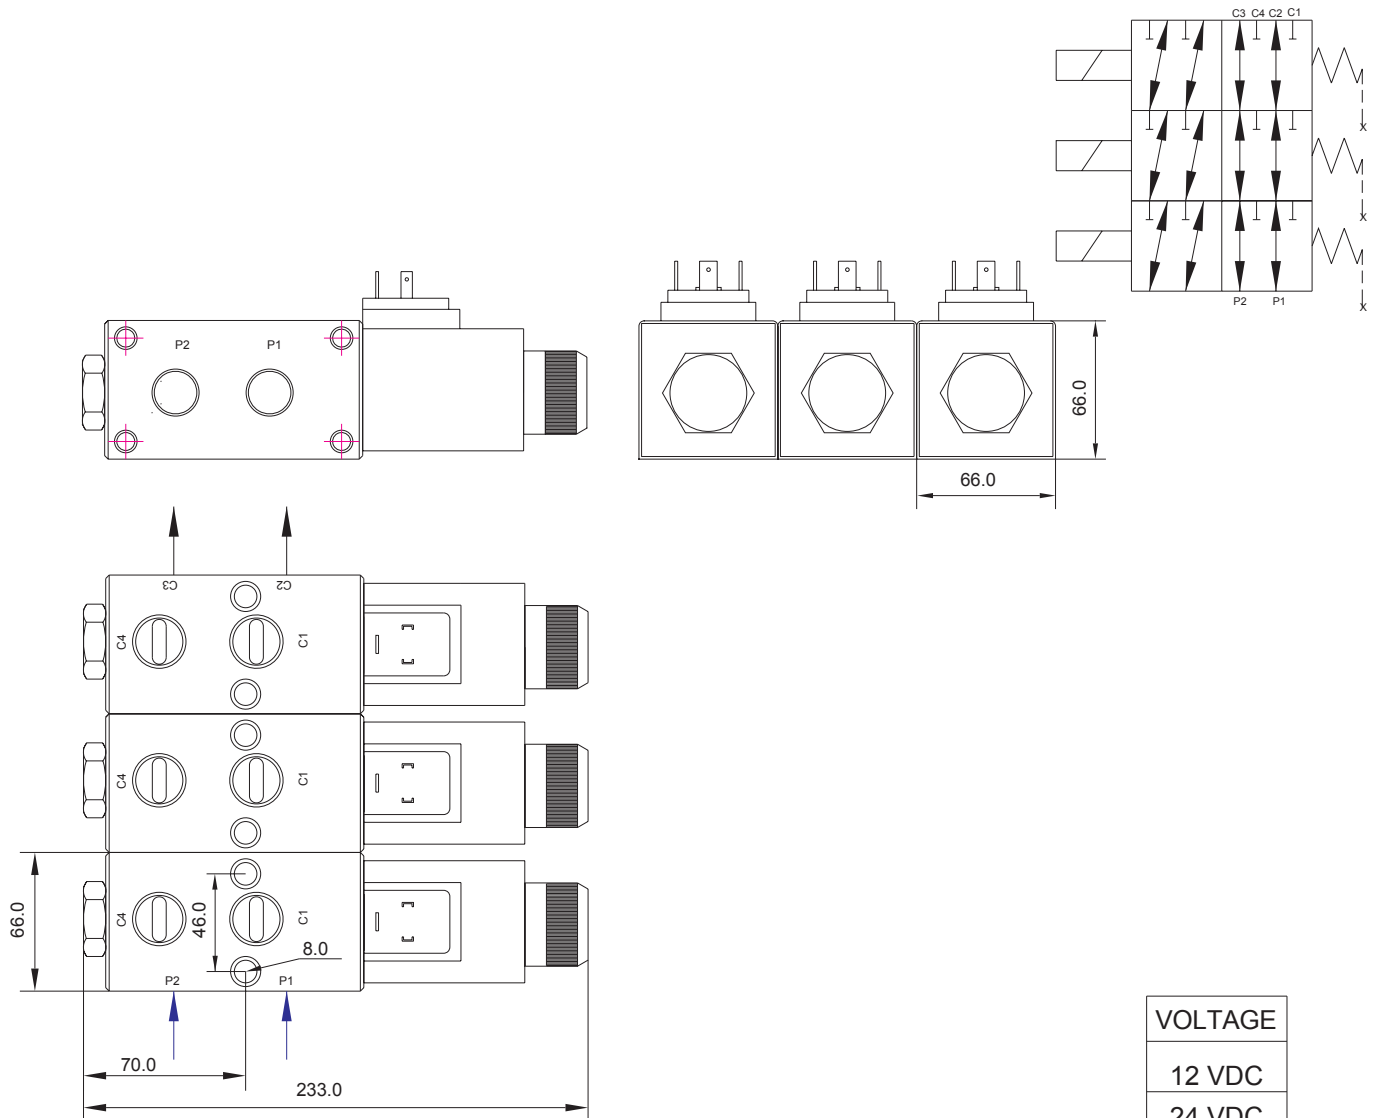

Model	Threaded coupling	Flow l/min	Max. pres. bar.	VOLTAGE	
				12 VDC	24 VDC
				E6212Y	R 1/2"
E6234Y	R 3/4"	80	210		
E62M22Y	M22x1.5	60	210		
E62M27Y	M27x2.0	80	210		