
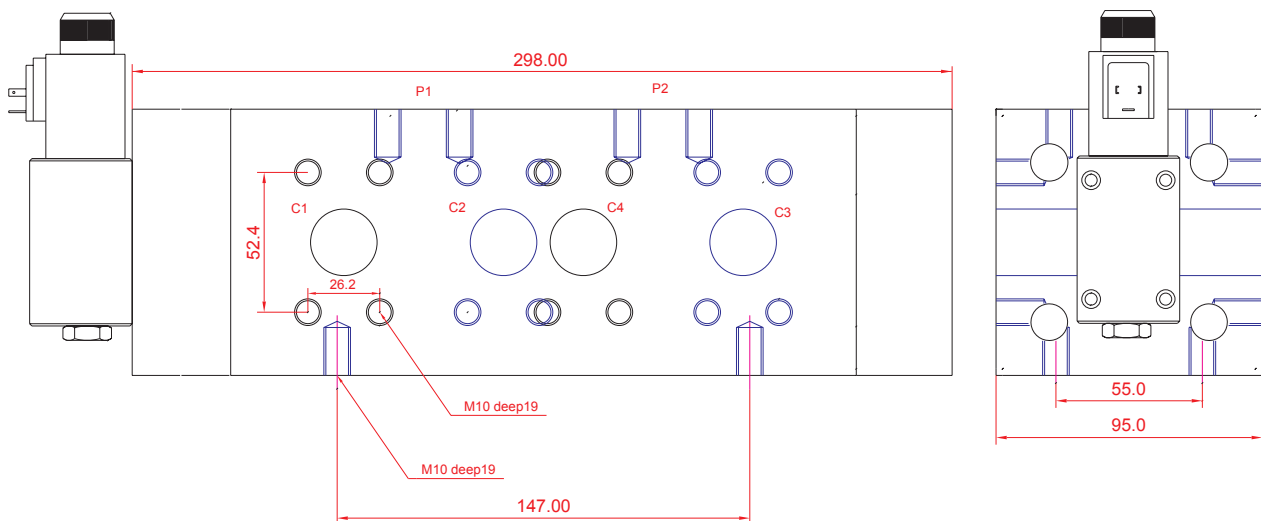


Solenoid pilot controlled 6/2 directional control valve R1"

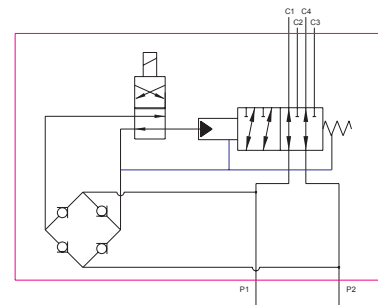

Direct threaded flange SAE 1" as connection flange

Model	Threaded coupling	Flow l/min	Max. pres. bar.
SE621	R1"	160	315