



Solenoid controlled 6/2 directional control valve, equipped with a relief/pop valve, R1/2"

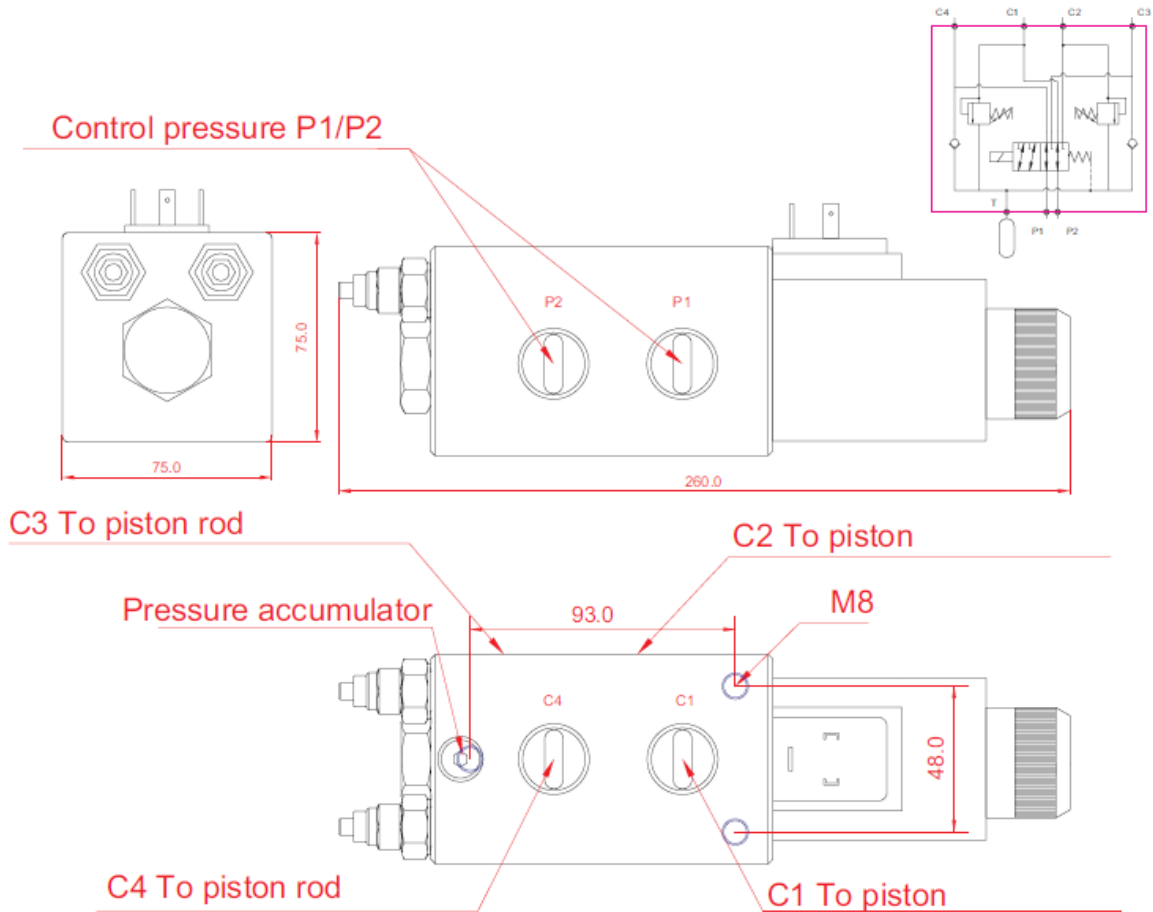

Model	Threaded coupling	Flow l/min	Max. pres. bar.
E6212PV	R 1/2"	75	210

VOLTAGE
12 VDC
24 VDC

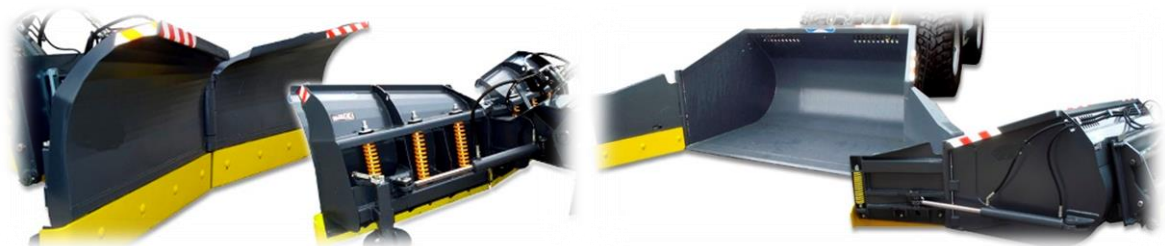

*examples of the usage